



FOTON
- VIEW CS2 -



No.1
In Brand Value
for Chinese
Commercial
Vehicles


No.1
Van
Exporter

No.1
Mid/High-end
Pickup Exporter

18 SEATER
BESTSELLER
VAN IN MALAYSIA

EXCELLENT POWER

- ▶ Low cost of maintenance Modular design reduces number of parts used by 40% and makes maintenance easier. Its failure rate is far below the level of other similar products.
- ▶ The EGR (Exhaust Gas Recirculation) system reduces nitrogen oxides (NOx) in exhaust gas and will increase fuel consumption rate when it takes part of load.

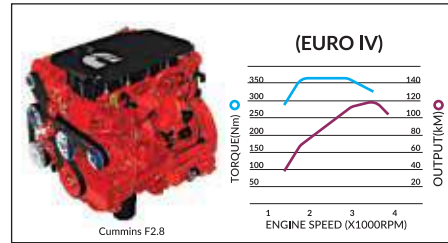

Engine model	ISF2.8
Type	In-line, 4-cylinder, electronic control, high pressure common rail
Displacement (L)	2780
Rated power (speed) [kw/(r/min)]	110 (3600)
Max. torque (speed) [N·m/(r/min)]	360 (1400-3000)

FASHION EXTERIOR TRIMS, LEADING THE NEW TENDENCY OF BUSINESS



INTERIOR TRIMS-MULTIFUNCTIONALITY





CS2



Tour Bus



School Bus



Worker Bus

MAINTENANCE SERVICE PACKAGE

No	PART NAME	Qty	MILEAGE (10,000 KM) OR 6 MONTHS ****(Whichever Come First)																	
			Mileage	2,500km	5/15/25/35/45/55/65/75/87/95 (x1,000km) (For severe usage condition)	10,000km	20,000km	30,000km	40,000km	50,000km	60,000km	70,000km	80,000km	90,000km	100,000km	110,000km	120,000km	130,000km	140,000km	150,000km
			Month	1	alternate 3 mths	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90
A. PARTS		Item																		
1	OIL FILTER ASSY - 5266016	1	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	
		83.91	83.91	83.91	83.91	83.91	83.91	83.91	83.91	83.91	83.91	83.91	83.91	83.91	83.91	83.91	83.91	83.91	83.91	
2	AIR FILTER CORE - K1119019001A0	1							R											
		53.18							53.18										53.18	
3	DIESEL FUEL FILTER - FS19925WUMF	1							R										R	
		97.94							97.94										97.94	
5	MISCELLANEOUS	1	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	
	Total	88.91	88.91	88.91	88.91	88.91	88.91	240.03	88.91	88.91	88.91	240.03	88.91	88.91	240.03	88.91	88.91	240.03	186.85	
B. LUBRICANTS																				
1	ENGINE OIL CF-4 15W/40 -5 LTR (SEMI SYNTHETIC) RM166	1	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	
		166.00	166.00	166.00	166.00	166.00	166.00	166.00	166.00	166.00	166.00	166.00	166.00	166.00	166.00	166.00	166.00	166.00	166.00	
2	RADIATOR COOLANT (-40F -SH0521 8.5 /9.5L) - (1LTR PACK) RM33.3	9	I			I	I	I	I	R									R	
		33.30								299.70									299.70	
3	POWER STRG FLUID ATF III 0.7±0.05L - (1LTR PACK) RM35.15	1		I		I	I	I	I	R									R	
		35.15								35.15									35.15	
4	MANUAL TRANSMISSION OIL GL-4 75W/90 - 2.4L - (1LTR PACK) RM10.75	3	R						R										R	
		10.75	32.25						32.25										32.25	
5	REAR AXLE OIL GL-5 80W/90 1.9L - (1LTR PACK) RM10.75	2				I	I		R										R	
		10.75							21.50										21.50	
6	BRAKE FLUID - DOT 4 0.75±0.05L -1L RM30	1	I	I	I	I	I	I	I	R									R	
		32.00								32.00									32.00	
	Total	198.25	166.00	166.00	166.00	166.00	219.75	532.85	166.00	166.00	219.75	166.00	532.85	166.00	219.75	166.00	166.00	532.85		
C. SST																				
1	Sale & Services Tax	6%	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	
D. LABOUR																				
1	SERVICE		80.00	80.00	80.00	80.00	80.00	80.00	80.00	80.00	80.00	80.00	80.00	80.00	80.00	80.00	80.00	80.00	80.00	
	TOTAL (RM) :		371.96	339.71	339.71	339.71	339.71	544.58	706.56	339.71	339.71	544.58	339.71	706.56	339.71	544.58	339.71	339.71	804.50	

Remarks

- Prices quoted are valid commencing from November 2018.
- The preventive service job covered is minimal replacement. This replacement may varies / alter based on user driving habit and road condition.
- This Maintenance Schedule is recommended to carry out on mileage or months whichever comes first.
- All effort has been taken to ensure that the information is accurate and up-to-date. However, prices are subject to change as and when necessary without prior update, and parts or services not covered in this guide are subject to additional charges.

Total Maintenance Service Interval ~100,000km= RM 7,620.42

SPECIFICATIONS

Product combination element	Brand		VIEW CS2
	Body		Wide body high roof
	Back door		Lifted back door
	Sliding door		Single sliding door
	Engine	Model	ISF2.8
		Emission	Euro IV
		Fuel type	Diesel
Power (Kw/rpm)		110/3600	
Torque (N-m/rpm)		360/(1400-3000)	
Transmission	Displacement (ml)	2780	
		5MT	
Main technical parameter			
Dimension parameter			
Design body external dimension (mm)		5990×1920×2320	
Wheel base (mm)		3720	
Mass parameter			
Total mass (kg)		4035	
Kerb mass(kg)		2435	
Loading weight (kg) (including persons)		1600	
Capacity (Person)		18	
Seating arrangement		2+3+3+3+3+4 (Foldable)	
Type of the last seat		Foldable seats	
Power performance			
Fuel economy			
Integrated operating condition of 100 km fuel consumption (full load)(L/100km)		≥ 9.4	
Function configuration			
Chassis system			
Wheel assy	Tyre		215/75R16LT
	Aluminium alloy		•
Brake safety device	ABS+EBD		•
Interior trim			
Type	Ordinary gray		•
Ceiling	Polyurethane + non-woven		•
Steering wheel	Adjustable angle of the steering wheel		•
	Ordinary PU		•
Seat	Seat fabric	Knitting	•
The number of sun visors		2	
Body and accessories			
Number of side sliding door		1	
Front and rear bumpers	Body colored bumpers (Without striae)		•
	Remote control central locking (Integrated key)		•
Door lock	Electric window		•
Front door	Electric(Manual folding)		•
Outside rear-view mirror	Chrome casing		•
Outside rear-view mirror housing	Rear wiper+Rear washer		•
	Rear defroster		•
Rear attachment	Rear Mirror		•
Safety			
Airbags	Driver's air-bag assy		•
	Assistant driver airbag		•
lamps and lanterns	Front fog lamp		•
	high-mount brake lamp		•
Reversing radar(singing)		•	
Body sound and light alarms		•	
Comfort			
Air-conditioner system	Air conditioner	Front	•
		Rear	•
	Warm brow	Front	•
		Rear	•
	Each row independent outlet		•
Ionizers		•	
Audio device		CD	
Number of speakers		6	
Others		•	
Others		Side outside antenna	



Exclusively brought to you by

MPIRE ASIA SDN BHD

☎ +603 5567 9858

✉ info@mpiregroup.com.my

🌐 <http://www.fotonmalaysia.com.my/>

📍 2, Jalan Pemberita U1/49,
Kawasan Perindustrian Temasya,
40150 Shah Alam,
Selangor Darul Ehsan, Malaysia.

Contact:

